



Picture	Description	Qty	Check list
	Connector cap	7	A
	American hanging plate + M5 hexagonal nut	1	B
	M10*5 hexagonal socket head cap bolt	5	C
	300*110*25 lamp baseplate	1	D
	Small hole tension head	4	E
	Locking iron parts	2	F
	M5 decorative iron parts	2	G
	A 1.8-meter-long main line	1	H
	A 1.6-meter-long steel wire rope at the head	4	I
	M4*12 gold-plated screw	20	J
	270mm branch lamp arm	10	K
	Universal head + Φ30*50 lamp cup + E12 lamp cap	10	L
	260mm long marquise-shaped crystal bead string	150	M
	Φ16*8 round flat screw nut	4	N
	732*82*1.5mm titanium gold stainless steel oval piece	1	P
	730*80*25mm lamp box	1	Q
	20mm - M10 L-beam iron piece with a nut assembly, equipped with M10*15 threaded pipe + M10*4 hexagonal nut	4	R
	Φ180mm five-branch trellis	4	S
	Φ30*50mm lamp cup	4	T
	M10*40 threaded pipe adapter M10*4 hexagonal socket head cap bolt	4	U
	E12 lamp holder	4	V
	A 40-centimeter long connecting wire	1	W

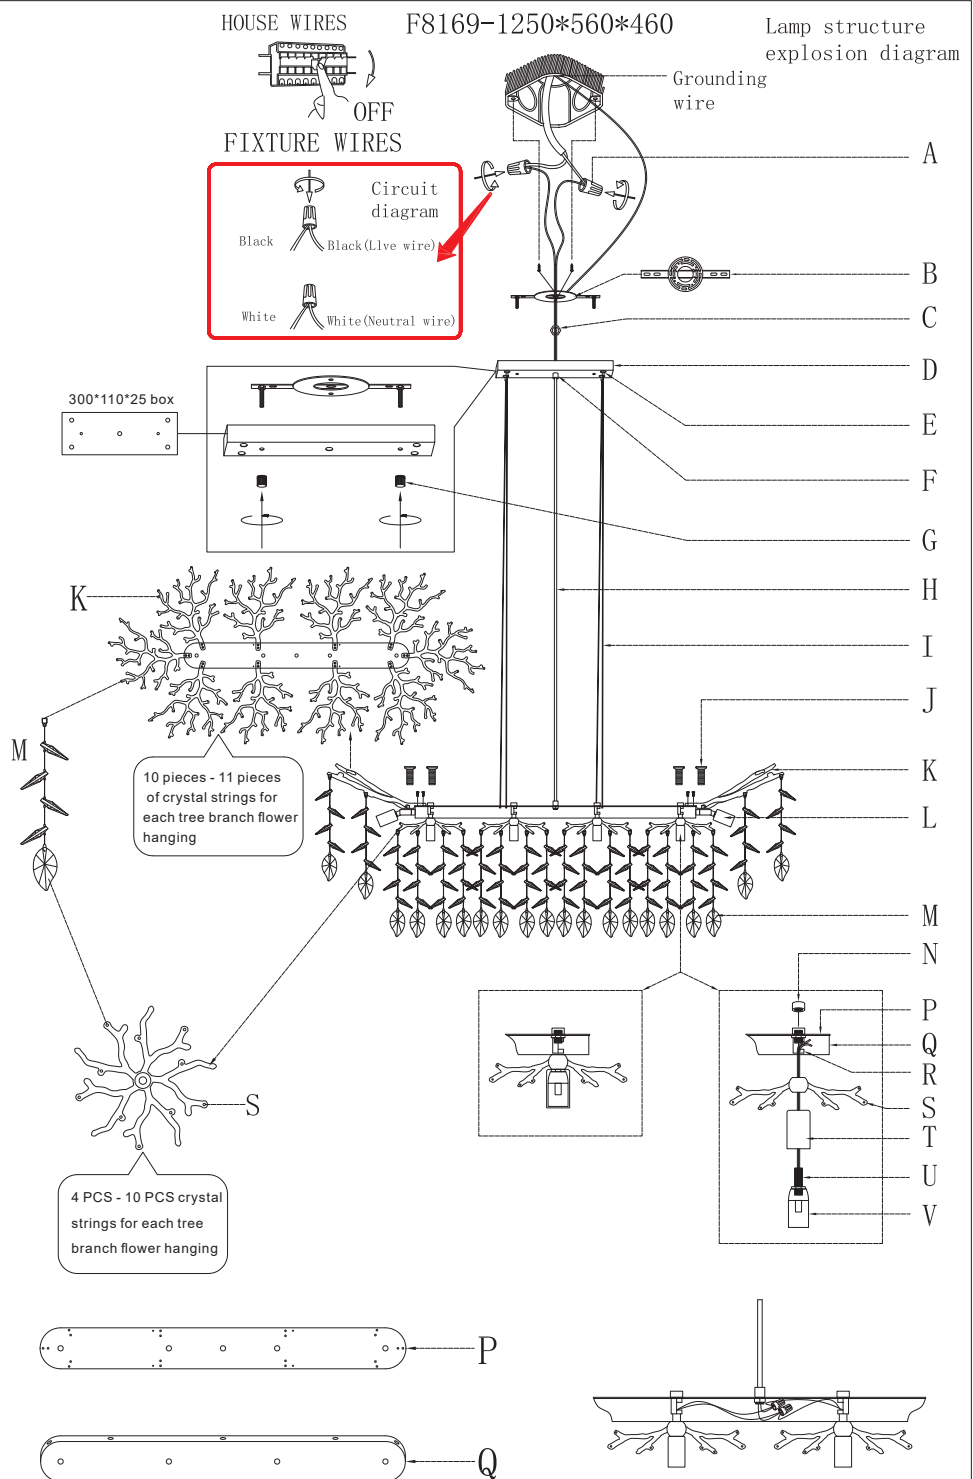

F8169/1250*560*460

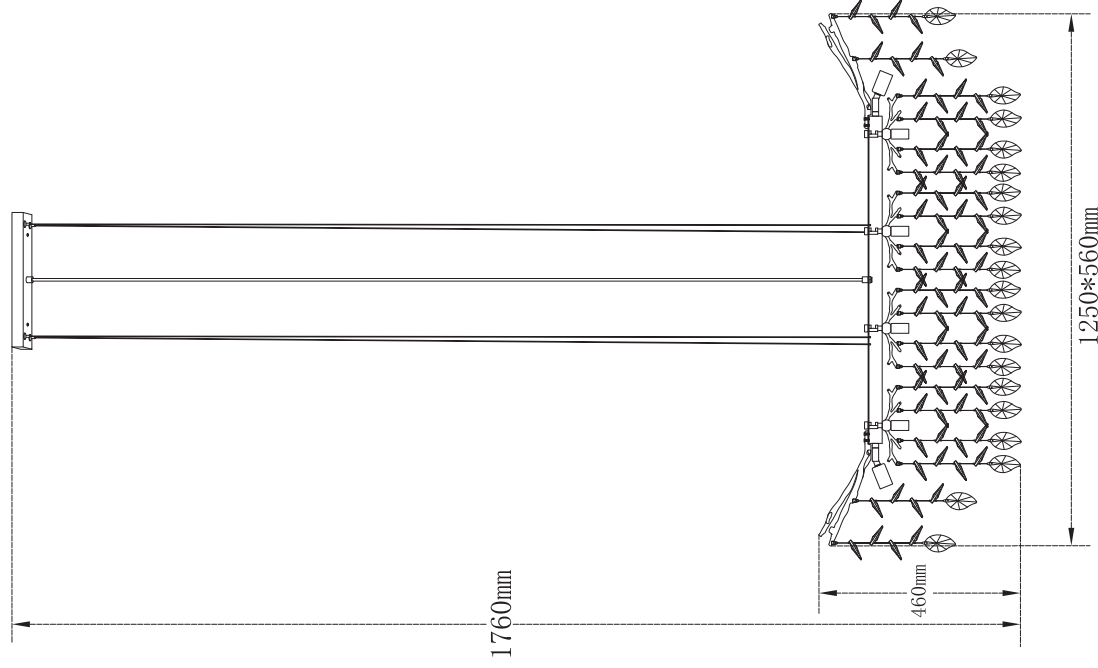

Installation steps are only for indoor installation

1. Carefully disassemble and determine each component to ensure that everything you are ready to install is placed on a clean surface, such as a table or floor. 2. Cut off the main power supply of the fuse box or circuit breaker in the house or building 3. Screw out M4 screws and remove the mounting bracket.
4. Use 8/32 screws to fasten the mounting bracket to the socket box.
5. Use a Phillips screwdriver (not provided) to screw out the M4 screw on the bracket.
6. Connect the wire from the clamp to the power wire from the outlet box and cover. Screw the neutral wire on the lamp drive and the neutral wire on the outlet box together and cover them with wire caps. Screw the live wire on the lamp drive and the live wire on the socket box together and cover them with wire caps. Remove the grounding wire from the clamp and socket box, and put them under the head of the green screw on the mounting bracket.
7. Carefully plug all wires into the socket box.
8. Insert the lamp panel into the bracket fixed on the wire box, make the head of M4 screw pass through the hole of the lamp panel, fix the lamp by tightening, and then adjust the balance of the whole lamp body.
9. Open the crystal bag and install the crystal string on the metal lamp holder according to the diagram.
10. Turn on the power test pendant lamp. Save these instructions for future use. If the light does not work, you can contact our customer service team to solve the problem

Maintenance method

Clean the water wave with a soft dry cloth or an electrostatic duster
Avoid the use of harsh chemicals and abrasives to clean the fixture and smooth the surface treatment.

Safety precautions

Your lamp is in the water, which will damage the circuit.

After sales problems can be contacted on the platform order page
We hope you like your new lighting as much. If your project meets or exceeds your expectations, we will be honored. If you write a comment to us, sharing your experience can help others and other customers understand your ideas. We really appreciate your support in making money.

After installation, the finger mold and sweat stains left on the metal and crystal surface of the lamp body can be cleaned with a soft dry cloth or an electrostatic duster.